

BRICKSLIPS ADHESIVE

for inside and outside

Composition:

According to DIN EN 12004 C2TE, standardized binders (cement according to EN 197); as well as additives; aggregates according to EN 13139

Areas of application:

Polymer-modified brick slips adhesive for laying in the thin and medium bed of ceramic tiles and slabs, split slabs, split slips and concrete stone works as well as fine stoneware. Suitability: for walls and floors; for indoor and outdoor

Product features:

Highly stable, highly compensated, reduced slipping

Processing:

Mix 15kg of CK-Brick slips adhesive with clear, cold mix tap water lump-free in a consistency suitable for processing. After the maturing time (approx. 5 minutes) mix thoroughly again.

Movement joints must not be bridged with CK brick slips adhesive.

Apply only as much CK brick slips adhesive as you can lay brick slips during the open time. In cases of doubt, test areas are to be created.

Material consumption

Consumption of CK brick slips adhesive with 6 teeth approx. 2.5kg / m²; 8 teeth approx. 3.5kg / m²; 10 teeth approx. 4.5kg / m²

Subsurface preparation

The subsurface must be stable and free of cracks. Less firm and / or not stable surfaces, or extremely dense and smooth substrates must be roughened. Separating layers (e.g. dust, grease, oil or paint residues etc.) must be removed. CK-Brick slips adhesive contains cement and therefore has an alkaline reaction when wet. Protect skin and eyes, in case of contact rinse thoroughly with water, if necessary consult a doctor.


Technical data:

Adhesive thickness up to 10mm, processing temperature + 5 ° C to + 25 ° C, temperature resistance -20 ° C to + 80 ° C mixing water per kg 0.26-0.35 l, open time approx. 30 minutes; Processing time 1.5 hours, accessible after 12 hours, fully loadable after 14 days

Storage:

Store in a cool, dry place protected from the weather on a wooden shelf. Close opened containers immediately. Shelf life 12 months from the date of manufacture

Klinkerwerk Küsters GmbH & Co. KG
Steinstr. 45
D - 47533 Kleve-Kellen

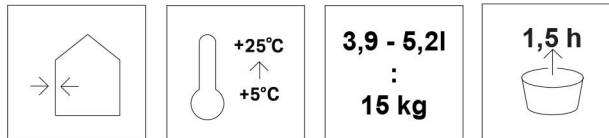

CK-Brick slips adhesive 15 kg

		Klinkerwerk Küsters GmbH & Co. KG Steinstr. 45 D - 47533 Kleve-Kellen
<p>Hazard and precautionary information: H315: Causes skin irritation. H318: Causes serious eye damage. H335: May cause respiratory irritation. P232: Protect from moisture P260: Do not breathe dust. P280: Wear protective gloves/eyewear/clothing. P305+P351+P338: If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing P310: Immediately call Poison Center. P302+P335+P352: If on skin: Brush of loose particles from skin. Wash with plenty of water. P333+P313: If skin irritation or rash occurs: Get medical advice. P501: Container to communal collection Contains cement. Giscode ZP1: Cement-containing products Further information: www.wingins-online.de</p>		

0790	
Number of the declaration of performance and unique identification code of the product type:	6000/1
Number of certificate	0790-CPR-1.3221.3845-11
	EN 12004 Cement-containing mortar for floor or wall coverings inside and outside
Fire behaviour to EN 13501-	A1
Bond strength to EN 1348-	C2TE ≥ 1,0 N/mm ²
Durability for initial shear strength to EN 1348-	
- Initial shear strength after water storage	≥ 1,0 N/mm ²
- Initial shear strength after warm storage	≥ 1,0 N/mm ²
- Initial shear strength after freeze/thaw storage	≥ 1,0 N/mm ²

P5W0-6057-U00M-TK2T



4002623080328